


FIXING MINI-CORRUGATED SHEETING

Ripple Tek[®]

Feature a Hi-Teks point for fast and easy drilling, and a unique head design that seals without a washer and does not deform the sheeting.

How To Use


1. Use a Tek gun of at least 350 watt capacity
2. Use maximum revs for drilling then slow down when the thread engages in order to set the screw properly. No need to push too hard, let the screw do the drilling.
3. Use a Buildex #2 Phillips drivebit.

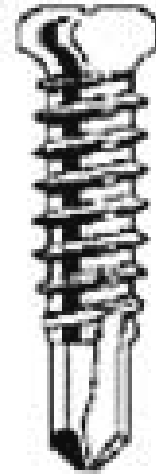


Performance Data					
Pullout Loads-Steel					
Purlin Thickness	G250/G300	G450/G500	G500	Mechanical Properties	
0.42mm			890N	Single Shear Strength	6.8KN
0.60mm	800N				
0.75mm	1300N				
1.00mm	1800N	2800N	1200N	Axial Tensile Strength	11.9KN
1.20mm	2500N	3500N			
1.50mm	3400N	4300N			
1.90mm	4900N	5800N	2000N	Torsional Strength	8.4KN
2.40mm	7000N	7800N			
3.00mm	8400N	9500N			

Applications

- For fixing mini-corrugated sheeting to steel
- Interior Walling/Ceiling
- Wall Cladding

Product Range					
Gauge	Dimensions	Product Features	Corrosion Coating	Pack Quantity	Part Number
10g				1000	6-311-0474-2ZA

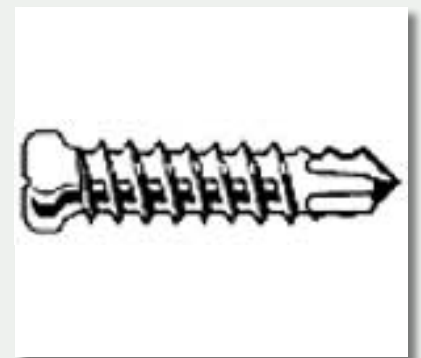

Metroll Newcastle

ABN 97 001 446 439
268 Macquarie Road
WARNERS BAY NSW 2282
AUSTRALIA

P: +61 (0)2 4954 5799

F: +61 (0)2 4954 0891

sales@metrollnewcastle.com.au

www.metrollnewcastle.com.au