

CORRUGATED STEEL ROOFING PROFILES TO TIMBER BATTENS

Roof Zips

For fitting corrugated steel roofing profiles to timber battens

A revolutionary new roofing fastener, the one fastener solution that exceeds roof fixers current fastener requirements. Fast and easy to install, reduces the amount of swarf, will not cause skidding on the roof profile, reduces damage to the washer, has multiple product applications (will also fix to thin metal battens and purlins) and will significantly reduce stock holdings.

How to Use


1. Use a Buildex 5/16" Hex Socket
2. Fit to a Tek gun set to 2500rpm
3. Put screw into driver and place at fastening position.
4. Squeeze trigger and maintain firm pressure until screw has drilled and fastened.


Performance Data

Pullout Strength

Host Material	KN
F5 Pine - 30mm	5.4Kn
F5 Pine - 35mm	6.3Kn
F17 Hardwood - 30mm	6.3Kn
F17 Hardwood - 35mm	7.2Kn

Hexagon Head Hi Grip[®] with Seal

Product Range				
Crest fixing corrugated steel roofing profiles to timber battens.		Dimensions	Pack Quantity	Part Number
	M6	M6-11x50mm	1000	6-030-3306-1C4
		M6-11x50mm	100	1-030-9306-1TPC4

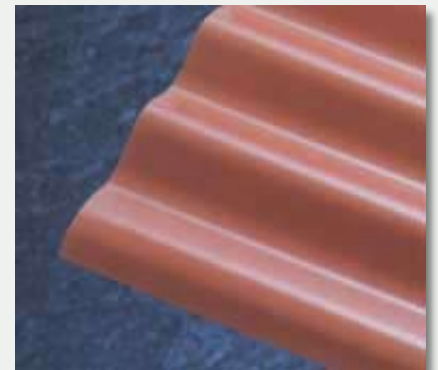

Metroll Newcastle

ABN 97 001 446 439
 268 Macquarie Road
 WARNERS BAY NSW 2282
 AUSTRALIA
 P: +61 (0)2 4954 5799
 F: +61 (0)2 4954 0891
 sales@metrollnewcastle.com.au
 www.metrollnewcastle.com.au