

Downpipes

We offer a wide range of downpipes to suit a variety of applications. Downpipes are manufactured in two standard sizes 100 x 50mm and 100 x 75mm and come in 2400mm length.

Our wide range of square, rectangular and circular down pipes are available in ZINCALUME® steel and a wide range of COLORBOND® steel colours. These down pipes are designed for greater durability, longer life and compatibility with steel and tile roofs.

They are manufactured from light, strong, high tensile steel and fast and easy to install. These complement the wide range of Metroll gutter, fascia, roofing and walling profiles.

Rainwater run off from roofing materials such as ZINCALUME® steel or COLORBOND® steels should NOT be drained into a plain galvanised gutter or downpipe.

The protective plastic film should be stripped off immediately on installation


- It is important gutters slope towards the outlets (a minimum gutter fall of 1 in 500 is recommended). Without this, slope 'ponding' may occur, reducing the life of your gutter
- When installing gutters, remove any metal particles or debris at the end of the day to prevent staining and corrosion
- Lead and copper are not compatible with ZINCALUME® steel or COLORBOND® steel

Install gutters with a generous fall to avoid ponding, but the fall should not be so steep as to be obvious to the casual observer. Fall on house guttering is often about 1:250 (12mm in 3000mm).

A steeper fall of 1:100 should give the gutter a longer life. The downpipe size and spacing should be determined in accordance with AS/NZ3500.

Colour Choices

COLORBOND® steel or
COLORBOND® Ultra and COLORBOND® Stainless steel or
Colour Chart for COLORBOND® Metallic steel

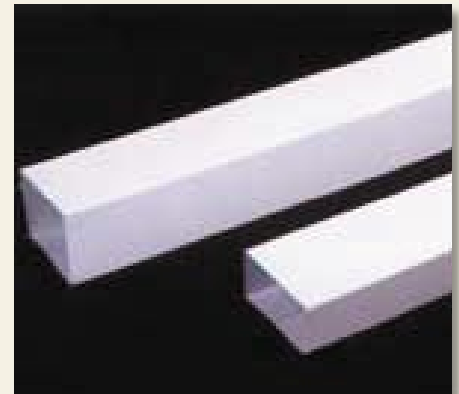

Metroll Newcastle
ABN 97 001 446 439
268 Macquarie Road
WARNERS BAY NSW 2282
AUSTRALIA

P: +61 (0)2 4954 5799
F: +61 (0)2 4954 0891
www.metrollnewcastle.com.au
enquiries@metrollnewcastle.com.au