

InsulRoof®

InsulRoof® features a corrugated COLORBOND® steel exterior, a lightweight expanded polystyrene core with fire-retardant (EPS-FR) for high performing insulation, and a prepainted COLORBOND® steel underside.

The InsulRoof® panels are strong, have longer spans and are faster to install, eliminating the need for traditional trusses, mesh, sarking, insulation, plasterboard and supporting trades.

Available nationwide with a 10 year warranty, InsulRoof® has the ultimate in thermal and aesthetic qualities.

InsulRoof® Benefits

- Deflects Heat
- Low Maintenance
- Design Versatility
- Quick Installation
- Easy Installation
- Product Core Options
- Expanded Polystyrene with fire-retardant (EPS-FR)
- Product Core Thickness
- High Water Carrying Capacity
- Wider Coverage

InsulRoof® Standard Colours



Basalt[^]




Classic Cream[®]



Dune[®]



Headland[®]



Jasper[^]




Pale Eucalypt[®]



Paperbark[®]



Shale Grey[®]




Surfmist[®]

* Other non-standard colours are available depending on minimum order qty.

[^] Darker colours are warranted for us in limited regions.

Please contact Metroll Newcastle for more information.

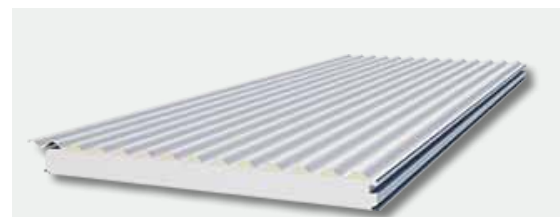

Metroll Newcastle

ABN 97 001 446 439
268 Macquarie Road
WARNERS BAY NSW 2282
AUSTRALIA

P: +61 (0)2 4954 5799

F: +61 (0)2 4954 0891

sales@metrollnewcastle.com.au

www.metrollnewcastle.com.au



InsulRoof[®]

Panel Finish Options

Plain Profile



Elegance Profile



InsulRoof[®] Applications

- Carports
- Covered Walkways
- Residential
- Patios/Pergolas
- Modular Buildings
- Home Improvement
- Home Renovations
- Insulated Roofing



Metroll Newcastle

ABN 97 001 446 439

268 Macquarie Road

WARNERS BAY NSW 2282

AUSTRALIA

P: +61 (0)2 4954 5799

F: +61 (0)2 4954 0891


sales@metrollnewcastle.com.au

www.metrollnewcastle.com.au


InsulRoof®

InsulRoof® Technical Data

Profiles

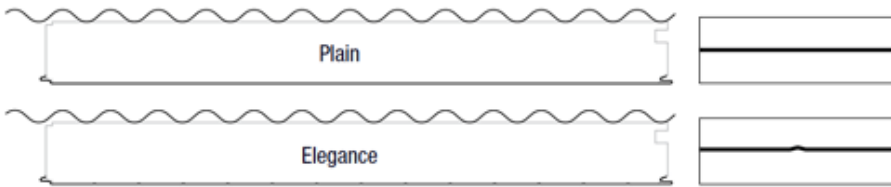

Dimensions

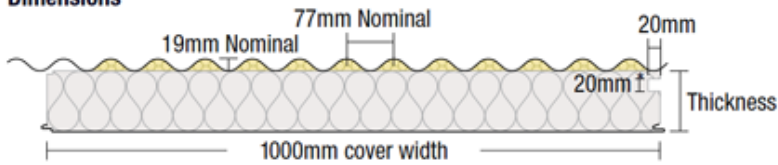


Module Width

1000mm cover width

Product Core

Expanded Polystyrene with fire-retardant (EPS-FR)

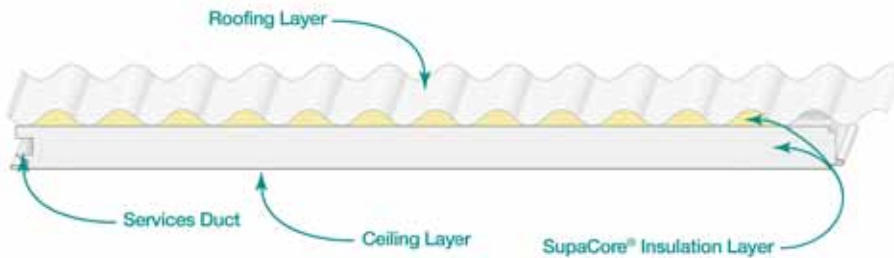

Core Thickness Options

50mm, 75mm, 100mm, 125mm, 150mm, 200mm

Accreditations

- AS 1530.3 Indices
- Heat Evolved Index 0
- Smoke Developed Index 1
- Spread of Flame Index 0
- Ignitability Index 0
- BCA Group 1
- BCA Part J Compliant



Metroll Newcastle

ABN 97 001 446 439
268 Macquarie Road
WARNERS BAY NSW 2282
AUSTRALIA

P: +61 (0)2 4954 5799

F: +61 (0)2 4954 0891

sales@metrollnewcastle.com.au

www.metrollnewcastle.com.au