


*Large Variety of Curving Styles*

# 0.60 CORODEK®

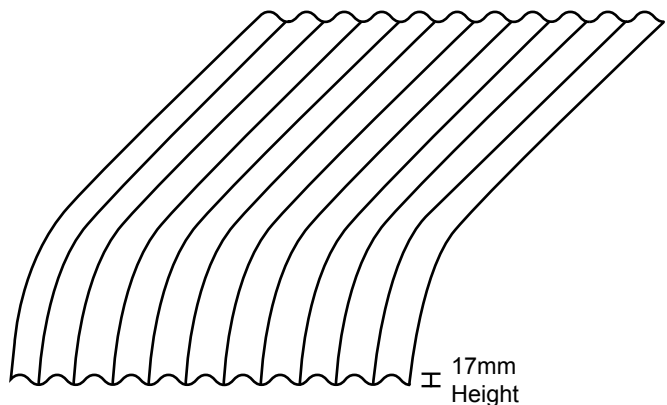


17mm  
Height

## About 0.60 CORODEK®

For curving and bullnosing, Metroll recommends a heavier gauge steel such as 0.60 CORODEK®. This is a custom length, corrugated roofing profile, manufactured from 0.60mm BMT\* COLORBOND® steel and ZINCALUME® steel or galvanised steel. G300 soft feed steel is used in 0.60 CORODEK® to allow for curving and bending.

\*BMT means Base Metal Thickness




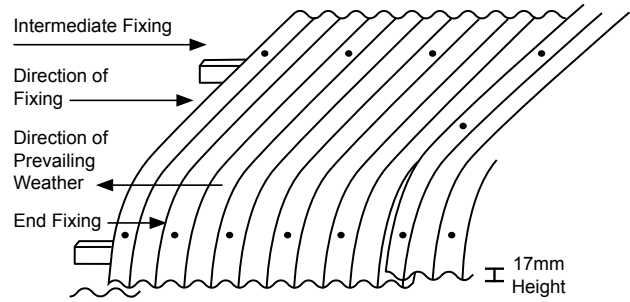


## Support Spacings

For typical bullnose verandahs in non-traffic applications the maximum allowable span is 1800mm. The overlapping sheets need to be secured at the midspan with either a heavy duty pop rivet or stitching screw.

The minimum recommended roof pitch for 0.60 curving quality CORODEK® is 5° (1 in 12). For roofs with end laps the minimum lap is 200mm for pitches between 5° - 15° and 150mm for roof above 15°. For walls allow maximum end laps of 100mm.


## Curving Styles

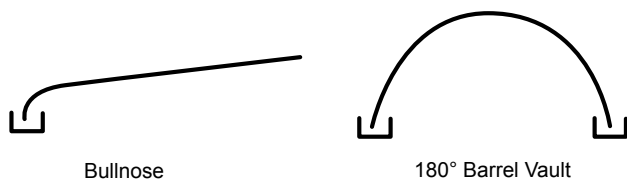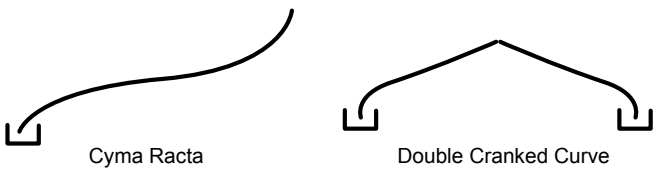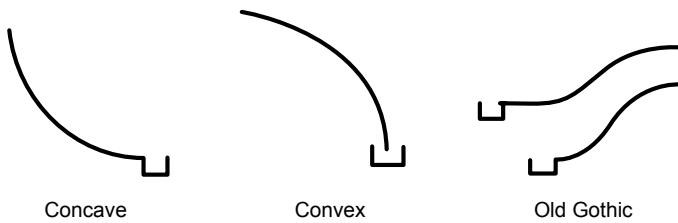


## Laying Sequence

For projects that require lapping of 0.60 CORODEK®, ensure that the sheets are installed in the sequence shown below.

Please contact your nearest Metroll office for end lapping of mixed BMT sheets.

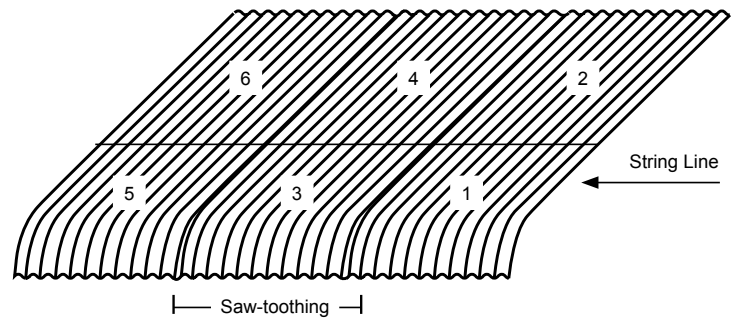

## Curving Details

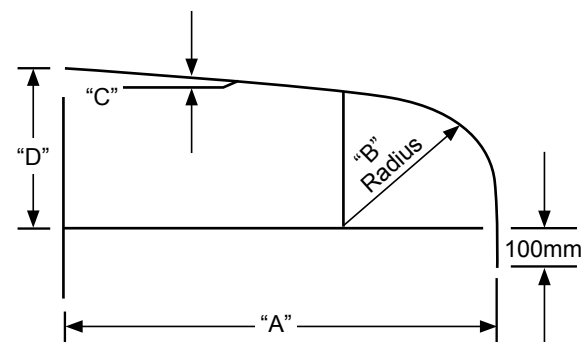

"A" - Awning Width


"B" - Radius

"C" - Roof Pitch in degree

"D" - Awning rise

*Note: No responsibility will be accepted by Metroll for variances for sheets curved from drawings. To ensure accuracy a template should be supplied.*

## Fixing Fastener Location

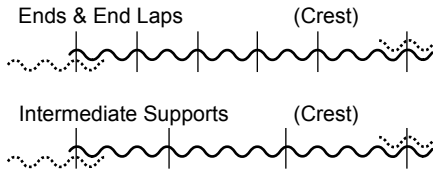

## Fasteners

### Softwood Timber Supports

M6 -11 x 50mm Roof Zips®, Hex Head with washer.

### Hardwood Timber Supports

T17 -12 x 50mm HiGrip®, Hex Head with washer.

### Steel Supports up to 5mm thick

M5.5 x 39mm AutoTeks®, Hex Head with washer.

## Installation

### Length

Metroll supplies 0.60 CORODEK® COLORBOND® or ZINCALUME® steel sheeting cut to customer specifications depending on load limit regulations set by the relevant local transport authority. Lengths to be manufactured and shape/radius of curves need to be site measurements, not those taken off plans. To prevent damage when lifting long lengths, ensure that the sheets are lifted with the use of multiple lift point spreader bars. Length tolerance of 0.60 CORODEK® is  $\pm 0-15$ mm.

### Handling of Material

When handling 0.60 CORODEK® care should be taken at all times to preserve the quality of the finish. Packs need to be kept dry and stored above ground on dunnage whilst awaiting installation. If the sheets become wet these need to be separated, wiped and placed in the open air to dry.

### Walking on Roof Sheeting

When walking on 0.60 CORODEK® roof sheeting always wear flat rubber soled shoes and walk over areas where you have installed purlin or batten supports.

### Saw-toothing

Saw-toothing occurs when curved steel sheets are overlapped. This is an inherent part of bullnosing and cannot be avoided. To ensure that the roof being fixed is running square it is essential that the saw-tooth at each sheet's end are equal in measurement.

### Clean Up

At the end of each work day, remove all foreign debris, screws, rivets and especially any swarf from drilling or cutting from the roof surface or from inside the gutters. Failure to do this may result in premature corrosion of the roof or gutter systems.

## Benefits

- Heritage style
- Variety of curving styles
- Modern architectural finishes
- Long lengths
- Custom cut
- Cost effective
- Variety of COLORBOND® steel colours
- Durable & strong
- Easy to install
- Large accessories range

## Materials

0.60 CORODEK® sheeting can be roll formed to order in ZINCALUME® steel, a wide range of COLORBOND® steel or galvanised steel. Please enquire at your nearest Metroll office with regard to lead times, colours and availability.

### Location of Fasteners at Supports

0.60 CORODEK® may be fastened to timber or steel supports by conventional crest fixing. There should be 5 fixings per sheet at ends and end laps for normal conditions and 3 fixings per sheet at intermediate supports. For severe exposure conditions, higher wind design pressures can be achieved by use of 5 fixings per sheet at intermediate supports.

### Compatibility

Never use lead flashings with 0.60 CORODEK® roof sheeting, as these products are inert materials. Drainage from copper roofs onto ZINCALUME® steel, COLORBOND® steel or galvanised steel roofing or rainwater products should not be allowed.

### Installation Tips


Use a carpenter's level to lay the first sheet. To ensure that the overlaps are snug, Metroll recommends using a rope with a hook at one end. Position the overlap and put the hook over the far end of the sheet running the rope down the overlap towards the curved end. Apply a downward force to the end of the rope while tapping the sheet slightly. A loop in the end of the rope will act as a stirrup for the fixer. Always measure every third or fourth sheet to check for squareness.

### Harsh Environments


If you intend to use 0.60 CORODEK® sheeting within 1km of industrial, salt, or unusually corrosive environments, do not hesitate to contact your nearest Metroll office for more information.

# CHECKLIST Do you require any of the following?

## Fascias, Gutters & Ancillary Items

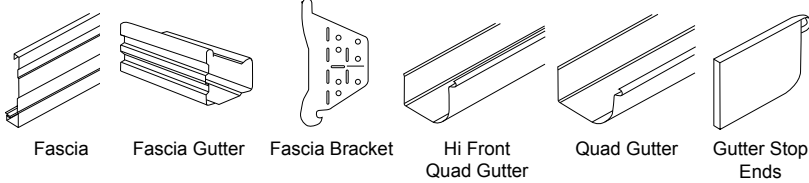


Fascia Fascia Gutter Fascia Bracket Hi Front Quad Gutter Quad Gutter Gutter Stop Ends

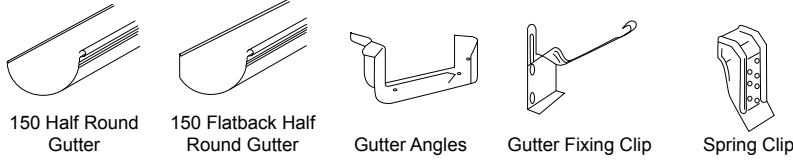


150 Half Round Gutter 150 Flatback Half Round Gutter Gutter Angles Gutter Fixing Clip Spring Clip

## Flashings & Cappings

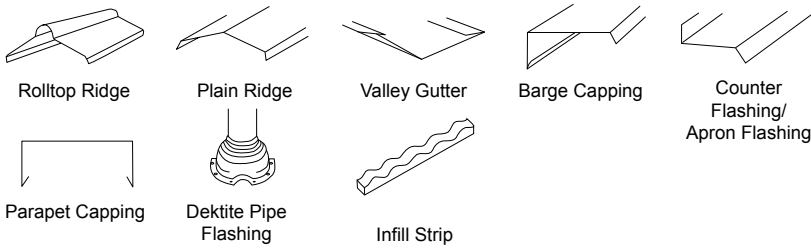


Rolltop Ridge Plain Ridge Valley Gutter Barge Capping Counter Flashing/Apron Flashing Parapet Capping Deklite Pipe Flashing Infill Strip

## Downpipes & Ancillary Items

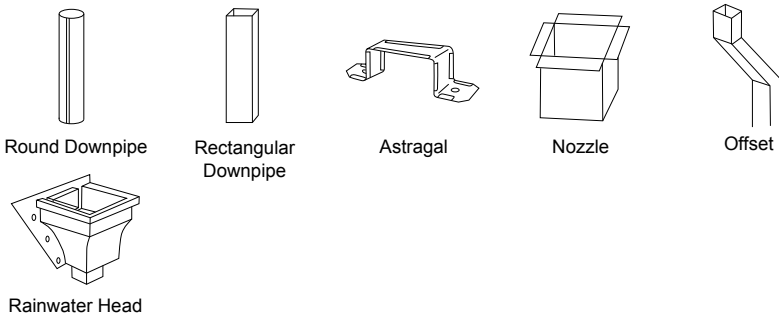

Round Downpipe Rectangular Downpipe Astragal Nozzle Offset Rainwater Head

## Other Products

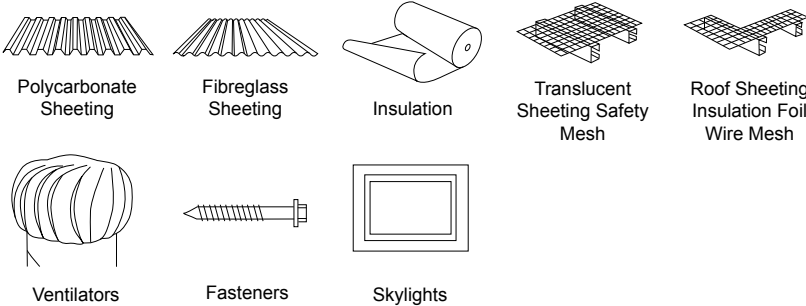

Polycarbonate Sheeting Fibreglass Sheeting Insulation Translucent Sheeting Safety Mesh Roof Sheeting Insulation Foil Wire Mesh Ventilators Fasteners Skylights

Distributed By:

Metroll Pty Ltd. ABN 97 001 446 439. All reasonable care has been taken in the compilation of the information contained in this brochure. All recommendations on the use of our products are made without guarantee as conditions of use are beyond the control of Metroll Pty Ltd. It is the customers responsibility to ensure that the product is fit for its intended purpose and that the actual conditions of use are suitable. Metroll Pty Ltd, pursues a policy of continuous development and reserves the right to amend specifications without prior notice. The Metroll M and Logo are registered trademarks of Metroll Pty Ltd.

AQUAPLATE®, COLORBOND®, GALVSPAN®, ZINCALUME® steels, Thermatech® are all registered trade marks of BlueScope Steel Limited.



## NSW Branches

### METROLL - Sydney

165 Airds Road, Minto, NSW 2566  
 PO BOX 1665, Campbelltown, NSW 2560  
 P: 1300 766 346 (Australia)  
 F: 1300 766 347 (Australia)  
 E: sales@sydney.metroll.com.au  
 www.metroll.com.au/sydney

### METROLL - Newcastle

268 Macquarie Road, Warners Bay, NSW 2282  
 PO BOX 267, Cardiff, NSW 2285  
 P: (02) 4954 5799 | F: (02) 4954 0891  
 E: sales@metrollnewcastle.com.au  
 www.metrollnewcastle.com.au

### METROLL - Tamworth

Lot 2 Jewry Street, Tamworth, NSW 2340  
 PO BOX W3177, West Tamworth, NSW 2340  
 P: (02) 6765 4799 | F: (02) 6765 2672  
 E: sales@tamworth.metroll.com.au  
 www.metroll.com.au/tamworth

### METROLL - Lismore

29 Krauss Avenue, South Lismore, NSW 2480  
 P: (02) 6622 6677 | F: (02) 6622 6678  
 E: sales@lismore.metroll.com.au  
 www.metroll.com.au/lismore

### METROLL - Dubbo

3 Jannali Road, West Dubbo, NSW 2830  
 PO BOX 615, Dubbo, NSW 2830  
 P: (02) 6883 4800 | F: (02) 6882 8008  
 E: sales@dubbo.metroll.com.au  
 www.metroll.com.au/dubbo

### METROLL - Wagga Wagga

560 Byrnes Road, Bomen, NSW 2650  
 PO BOX 672, Wagga Wagga, NSW 2650  
 P: (02) 5924 4500 | F: (02) 5924 4599  
 E: wagga@metroll.com.au  
 www.metroll.com.au/wagga

### Palmer Steel Frame & Truss P/L Narrabri

15 Kaputar Road, Narrabri, NSW 2390  
 PO BOX 294, Narrabri, NSW 2390  
 P: (02) 6792 1082 | F: (02) 6792 4322  
 E: info@palmerframes.com.au  
 www.palmerframes.com.au

For other state contacts visit  
 www.metroll.com.au